

Single-part H. Design round floor drain (Ø300 mm) D300 DN110 V1/H1, DN160 V1/H1

ATT stainless steel floor drain features:



Vertical outlet DN110 or DN160



Horizontal outlet DN110 or DN160

- the drain is manufactured according to EN 1253 and EHEDG guidelines
- round shape,
- upper part of the body DN 300 mm,
- hygienically deep-pressed body without sharp corners or elements,
- bottom body diameter: 255 mm,
- no fluid backing up in the floor drain's body
- flow rate 5.7 l/s.
- siphon with EPDM gasket
- height of the water column is 50 mm,
- waste basket (capacity 2,9 l) with handle,
- top edge brushed,
- M10 adjustment screws,
- material EN 1.4301, AISI 304 or EN 1.4404, AISI 316L,
- sheet thickness: 1.5 mm.



Siphon



Waste basket




Sand basket

Grating of the floor drain

(Ø300 mm) D300 DN110 V1/H1, DN160 V1/H1

Mesh grating, with 25 x 25mm mesh, with R13 anti-slip surface according to DIN 51130. Meets the requirements of load class L15 according to EN 1253.

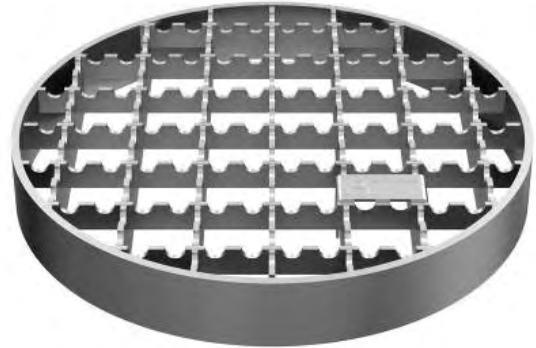

Slab grate with side gap, easy to remove. R10 anti-slip surface in accordance with DIN 51130. Meets the requirements of load class M125 in accordance with EN 1253.



Solid plate grate with gasket: gas-tight and water-tight; with suction cup. R10 anti-slip surface in accordance with DIN 51130. Meets the requirements of class M125 load class in accordance with EN 1253.



Ladder grate with smooth, non-slip surface R9 in accordance with DIN 51130. Meets the requirements of load class M125 in accordance with EN 1253. Complete welding in accordance with EHEDG compliant.

